

M-Series Caster Bed Cargo Dolly

**Specifically designed for
changing ramp operations**

Easily transport variable size pallets and containers with the M-Series caster deck cargo dolly. Multiple position pallet stops and restraints provide versatility for ever changing workloads. Engineered with lighter-weight, high-strength steel, the M-Series dolly can maneuver 15,000 lbs. capacity at 20 mph tow speeds. Sealed bearing rollers and casters prevent wearout and maximize longevity.

AIRCRAFT LOAD/UNLOAD
FREIGHT TRANSFER
CONVEYING OPERATIONS
ULD/PALLET MANEUVERABILITY



FUEL ECONOMY




WEIGHT

Open caster channels and axle supports prevent snow and ice build up

Lighter-weight, fully fabricated high-strength steel frame provides increased durability, reduced fuel consumption and less wear and tear

Interchangeable FAST Components minimize replacement parts inventory

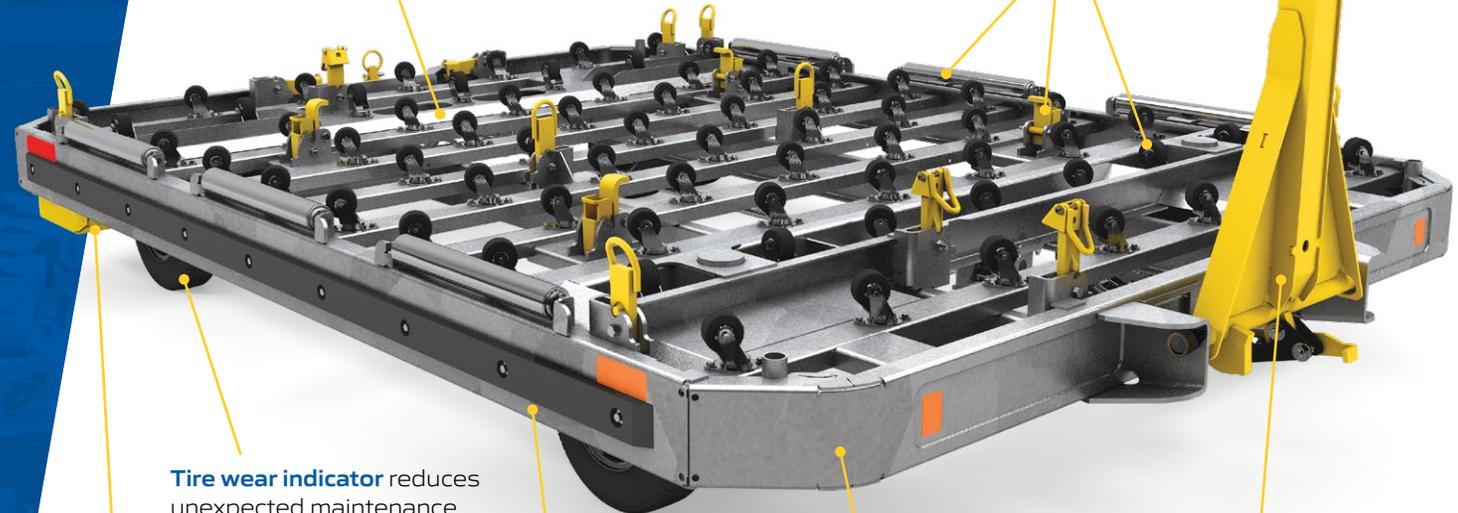

Tire wear indicator reduces unexpected maintenance time and costs

Towbar-actuated **Self-adjusting brake system** assures stoppage after long-term wear

Reinforced frame for side impacts

Reinforced corners for impact resistance

Patented **EasyLift™ Towbar** maintains position for safer connections, keeps operator in full control through entire range of motion



Additional Features

- **Recessed decal/asset protection** integrated in frame
- **Recessed hitch** for protection from touch events
- **Reinforced rear axle**, towbar and towbar/frame connections
- **Larger Fenders** for 360° front caster tire splash protection
- **Robust tuning contact points** integrated into the frame
- **Integrated brake support** for improved motion
- **Optimized 88" and 96" stop locations** for ergonomics and safety, helps operators remain outside of dolly and loader/deck area, and visible to team

SPECIFICATIONS

Height	20.5"
Width	102"
Length	Towbar down: 182.7" Towbar up: 160.6"
Weight	Dolly: 1982 lbs. Shipping tubes: 13 lbs. Total shipping weight: 1995 lbs.
Container/Pallet Compatibility:	LD-1, LD-2, LD-3, LD-4, LD-5, LD-6*, LD-7, LD-8, LD-9, LD-10, LD-11, LD-29*, 88x125, and 96x125

* top of ULD will be outside dolly, with potential to contact ULDs on other dollies in the train

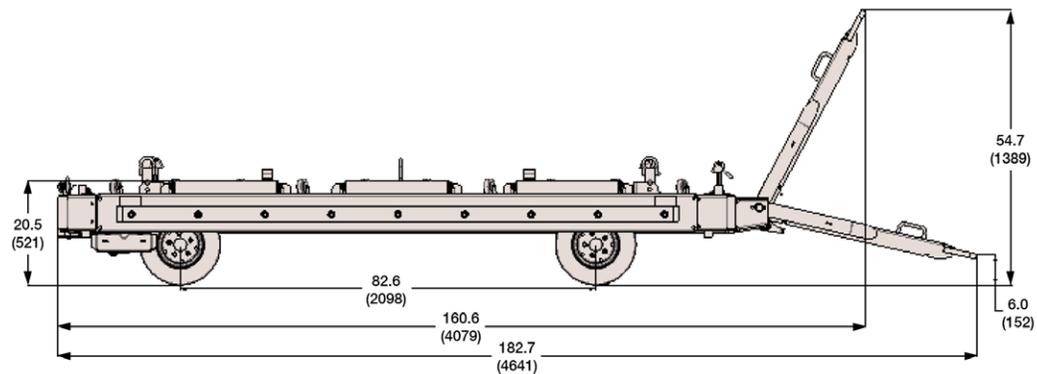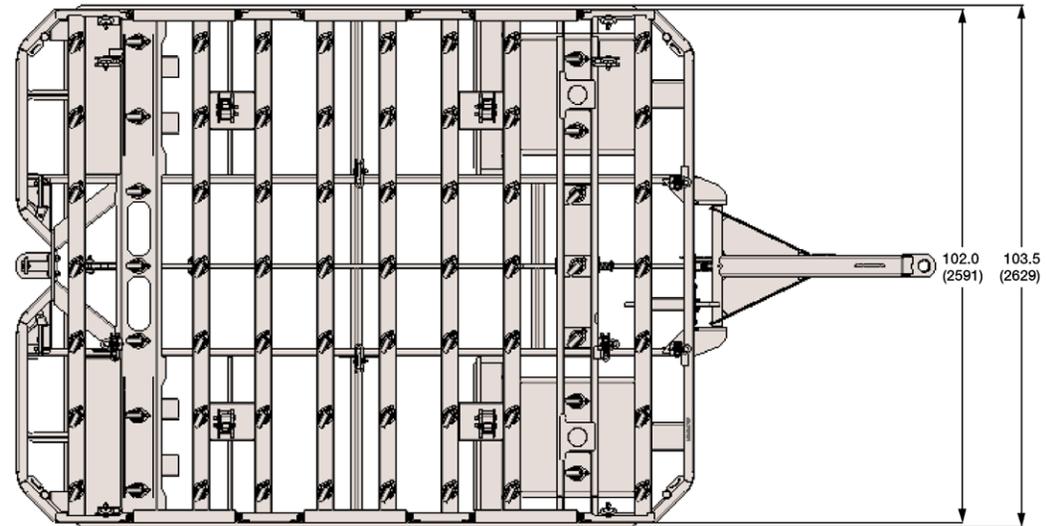

AIRCRAFT LOAD/UNLOAD
FREIGHT TRANSFER
CONVEYING OPERATIONS
ULD/PALLET MANEUVERABILITY

A world leader in airline, air cargo and material handling equipment for over 40 years, FAST designs, builds, installs and services an expansive portfolio of robust, ruggedly-built, dependable equipment for today's global commerce operations.

To learn more, contact the knowledgeable and experienced FAST Team:

info@fastsolutions.com +1 (320) 634-5886 fastsolutions.com